

1/2" DRIVE DEEP IMPACT SOCKETS



1/2" DRIVE DEEP IMPACT SOCKETS



Part#	Size	Part#	Size
2012D	3/8"	2024D	3/4"
2014D	7/16"	2026D	13/16"
2015MD	15MM	2027MD	27MM
2016D	1/2"	2028D	7/8"
2017MD	17MM	2030D	15/16"
2018D	9/16"	2032D	1"
2018MD	18MM	2034D	1-1/16"
2020D	5/8"	2036D	1-1/8"
2022D	11/16"	2040D	1-1/4"
2022MD	22MM	2040HD	1-1/4"

1/2" DRIVE EXTRA-THIN WALL SOCKETS

These extra-thin wall deep impact sockets are designed to allow easy access to recessed wheel nuts where space is limited. Due to the extra-thin wall design, they should be used only on passenger and light truck wheel nuts. Use Only with 1/2" Drive Tools. DO NOT use with reducing adapters.

Part#	Size	Part#	Size
2019MDT	19mm	2024DT	3/4"
2021MDT	21mm	2026DT	13/16"
2022MDT	22mm	2028DT	7/8"
2023MDT	23mm	2034DT	1-1/16"

1/2" DRIVE FLIP SOCKETS

Unique hex opening on each end so that a single socket can accommodate two hex sizes. Thin wall design to fit most recessed wheel nuts.

Part#	Size	Part#	Size	Extra Thin Wall
2346D	3/4x13/16	2146DT	3/4x13/16	
2392D	19x21mm	2192DT	19x21mm	
2349D	7/8x15/16			

1/2" DRIVE FLIP SOCKET SET

A set of four (4) thin wall "flip" style impact sockets that have two different hex sizes in each socket. Sockets are designed for auto and light truck wheel fasteners. Use with 1/2" drive extended shank impact tools or regular shank impact tools with an extension.

2346D 3/4" x 13/16" 2349D 7/8" x 15/16"
 2392D 19mm x 21mm 2351D 1" x 1-1/16"

Part#
1504FW

Reese Automotive Warehouse 800-243-6636





1/2" DRIVE DAMAGED NUT REMOVERS



1/2" DRIVE DAMAGED NUT REMOVER MASTER KIT

SET CONTENTS:




- 2305NR - #5
- 2306NR - #6
- 2307NR - #7
- 2308NR - #8
- 2309NR - #9
- 2310NR - #10
- 2311NR - #11
- 2312NR - #12
- 2313NR - #13
- 2314NR - #14
- 2316NR - #16
- 2318NR - #18

All twelve (12) sizes of our Damaged Nut Remover Impact Sockets, listed individually above, packaged in a convenient carry case

**Part#
2300K**


1/2" DRIVE WHEEL LUG NUT REMOVER KIT

A set of two of our most popular removers for rounded automobile wheel hex nuts from individual sizes listed above. Two sizes fit most passenger and light truck wheel lug nuts. They also fit many wheel locks.

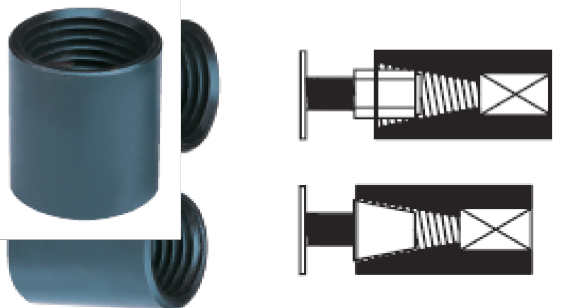

**Part#
2400K**

1/2" DRIVE DAMAGED NUT REMOVER INDIVIDUAL SOCKETS

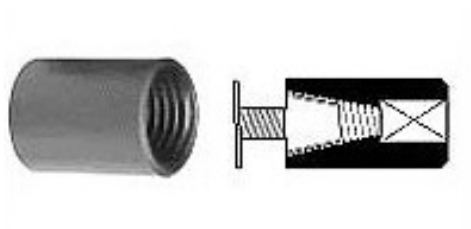

Part #	Size	Nut Size
2305NR	#5	1/2" (13)
2306NR	#6	9/16" (14)
2307NR	#7	5/8" (15)
2308NR	#8	5/8" (16)
2309NR	#9	11/16" (17)
2310NR	#10	3/4" (19)
2311NR	#11	3/4" (19)
2312NR	#12	13/16" (21)
2313NR	#13	13/16" (21)
2314NR	#14	7/8" (22)
2316NR	#16	15/16 & 1"
2318NR	#18	1 & 1-1/16"





1-1/2" OUTER BUDD NUT REMOVER KIT

Caution: Hammer on rib nut only when it is inside the drive-on tool.

Do not hammer on it separately.

This tool removes damaged or rounded off outer cap nuts on budd wheels. Simply drive the tool over the nut and remove with an impact wrench or breaker bar.

Replacement parts are also available separately.

3 piece set contents:

2421* 1-1/2" Drive-on Rib Socket	Part#
2414 Drive-on Tool	2411
2422 Drive Pin	

INNER CAP NUT REMOVAL KIT

This kit removes inner cap nuts on budd wheels when the square head of the nut has broken off. Simply drive the rib nut over the broken cap nut and remove with an impact wrench.

2 piece set contents:

2414 Drive-on Tool	Part#
2415* 1-1/8" Rib Nut	2412

INNER CAP NUT & WHEEL STUD REMOVAL KIT

This kit removes inner cap nuts on budd wheels when the square head of the nut has broken off. Also included are rib nuts to remove 5/8" and 3/4" spoke wheel studs. Simply drive the rib nut over the broken cap nut or wheel stud and remove with an impact wrench.

4 piece set contents:

2414 Drive-on Tool	
2415* 1-1/8" Rib Nut	
2416* 5/8" Rib Nut	Part#
2417* 3/4" Rib Nut	2413

RIB NUT SALVAGE TOOL KIT

This kit makes removal of the broken cap nut from the rib nut easy when using our 2412, 2413 kits that use the 2415 rib nut. After the cap nut has been removed from the wheel, screw the stud provided into the cap nut, place the cap and rib nut into the holder and drive the nut out with the pin provided.

4 piece set contents:

2423A Salvage Cylinder	
2423B Wheel Stud (R)	
2423C Wheel Stud (L)	Part#
2422 Drive Pin	2423





REPLACEMENT PARTS FOR CAP NUT & STUD REMOVAL TOOLS

Part Number	Description	Application
2414	Drive-On Tool Only	Tool for Driving on all Rib Nuts
2415*	1-1/8" (13/16" Sq. Head) Rib Nut	For removing broken 13/16" Square Inner Cap Nuts
2416*	5/8" Rib Nut	For removing broken 5/8" Wheel Studs
2417*	3/4" Rib Nut	For removing broken 3/4" Wheel Studs
2419*	M25 (17mm Sq. Head) Rib Nut	For removing broken 17mm Square Inner Cap Nuts
2420*	M30 (21mm Sq. Head) Rib Nut	For removing broken 21mm Square Inner Cap Nuts
2421	1-1/2" Rib Socket	For removing 1-1/2" Outer Cap Nuts
2422	Drive Pin	Removes Cap Nut from Rib Nut

KEN CAP NUT & WHEEL STUD REMOVAL TOOLS

One-Piece tools for the removal of broken/stripped inner cap nuts and spoke wheel studs. When hammered on, self tapping spines cut grooves down the stud for easy removal.

Part Number	Description	Application
2515*	1-1/8" Inner Cap Nut Removal Tool 2-3/4" Long	For removing 13/16" square Head Inner Cap Nuts
2516	5/8" Wheel Stud Removal Tool	For removing 5/8" Broken Wheel Studs
2517	3/4" Wheel Stud Removal Tool	For removing 3/4" square Broken Wheel Studs

STUD SETTERS FOR INSTALLING SPOKE WHEEL STUDS

Special tools for installing studs on cast spoke wheels. Used with 1-1/4" hex socket. Additional sizes and thread types are available upon request.

Part Number	Description	Application
2616	5/8" Stud Installer	For installing 5/8"-11 Wheel Studs
2617	3/4" Stud Installer	For installing 3/4"-10 Wheel Studs

