

CAP NUT WRENCHES

TX9® Ken-Tool Porkchop™
Wrenches hold outer cap nut on dual wheels while turning inner nut. Lip fits in hole to secure wrench in place. Sizes offered fit standard and metric cap nuts



Part#
30609

PNEUMATIC BEAD EXPANDER

Expanders fit most bias ply passenger tires. Expanders slip easily over tire and withstand contact with oil, grease, and solvents. Draw the strap tight and lock with two rings.



Part#	Description
31432	T132 Bead Expander
31433	T133 Bead Expander

HEAVY DUTY CAP NUT WRENCH

TX 200 Heavy-Duty design will not slip out of position. Wrench rests snugly against the center hole reducing the possibility of rim damage. Great for aluminum wheels



Part#
30618

TIRE SPREADER

Any of these tire spreaders will aid in opening up the tire for patching or cleaning.
31553 Tire Spreader 7-1/2"



Part#	Description
31553	T53 Spreader
31551	T51 Spreader

COMBINATION CAP NUT WRENCH

TX50 Offers the versatility of two wrenches in one unique product design. Fit one end onto the outer cap nut with the other end through the center hole. Wrench slides underneath center disc of wheel reducing slipping during nut removal



Part#
30620

WHEEL COVER PULLER

Removes wheel covers quickly and easily without gouging or scratching them. Rubber head prevents damage to hub cap and is replaceable.



Part#	Description
31567	T67 Hub Cap Hammer
31568	T68 Hub Cap Hammer

OIL FILTER WRENCH

G42 oil filter pliers/wide jaw pliers. Removes stubborn, on-tight filters. Fits 4-5/8-5-3/4" filters.



Part#
31042

BEAD HOLDER


Bead Holding Device. Holds the bead in place against the wheel when mounting the tire on to the wheel.



Part#	Description
31710	Bead Holder

TIRE BEAD SEATERS

One-piece rubber tube for mounting hard-to-seat radial, bias-belted, or conventional truck tires.



Part#	Description
31430	Bead Seater
31439	Truck Bead Seater
31446	Bead Seater

TIRE MOUNT/DEMOUNT SPOONS



CURVED

Part#	Model	Length	Stock
32102	T2X	18"	11/16"
32120	T20	24"	11/16"
33220	T20A	30"	11/16"
33239	T39	30"	7/8"



KEN TOOL

MOUNT/DEMOUNT TIRE TOOLS



SMALL TIRE

Tools are used in pairs to mount or demount small passenger, industrial, ATV, and motorcycle tires.

Part#	Model	Length	Stock
32106	T6A	16-1/2"	5/8"

RIM LOCK TOOL



Designed for smaller diameter wheels.

Part#	Model	Length	Stock
32125	T25	18"	11/16"

TIRE IRONS-SMALL TIRE



Pro tire changing tools for small tires. Ideal for mounting and demounting motorcycle, ATV, lawn tractor, golf cart, and small tires by hand. Rounded ends will not pinch tube. Card of 2 irons.

Part#	Model	Length	Stock
32117	T16C	16"	7/16"

BEAD BREAKING/DRIVING IRON



Driving iron is used for loosening rusted truck and bus beads. Will speed truck tire repair work and save labor and time.

Part#	Model	Length	Stock
32126	T26A	11-3/4"	1-1/4"

TIRE MOUNT/DEMOUNT SPOONS



STRAIGHT

Part#	Model	Length	Stock
32119	T19	24"	11/16"
33219	T19A	30"	11/16"
33238	T38	30"	7/8"

SPECIAL LOCK RING TOOL



These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.

Part#	Model	Length	Stock
32127	T27	18"	11/16"

DROP CENTER



Part#	Model	Length	Stock
32121	T21R	18"	11/16"
34121	T21F	24"	11/16"
34122	T21HD	30"	7/8"

SPECIAL LOCK RING TOOL



These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.

Part#	Model	Length	Stock
32128	T27A	18"	11/16"

TRUCK LOCK RING REMOVER



Designed for smaller diameter wheels.

Part#	Model	Length	Stock
32123	T23	24"	11/16"

SPECIAL LOCK RING TOOL



These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.

Part#	Model	Length	Stock
33223	T23A	30"	11/16"



HEAVY DUTY LOCK RING TOOL



These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.

Part#	Model	Length	Stock
34648	T48A	37"	3/4"

WRENCH SUPPORT STAND

Commercial-duty stand used to support a double-end truck wrench, a 4-way lug wrench, or a torque wrench, when removing or replacing lug nuts.



Part#	Model
32610	32610

SWAN NECK LEVERAGE BAR



These lightweight, portable tools are a great alternative to handled bead breaking wedges or hydraulic bead breakers. One end is used to remove frozen or rusted beads from all types of rims.

Part#	Model	Length	Stock
32140	T40	18"	7/8"

COMBINATION RIM/RING TOOL



Flat tapered end ideal for all around ring and rim work.

Part#	Model	Length	Stock
33224	T23B	23-1/2"	11/16"

SWAN NECK LEVERAGE BAR



These lightweight, portable tools are a great alternative to handled bead breaking wedges or hydraulic bead breakers. One end is used to remove frozen or rusted beads from all types of rims.

Part#	Model	Length	Stock
33341	T41	30"	7/8"

BAD BOY JIMMY PRY BARS



Long pointed taper can be used as a lining-up drift. Used for prying, positioning, and aligning

Part#	Model	Length	Stock
34118	P118	18"	11/16"
34124	P124	24"	3/4"
34130	P130	30"	7/8"

BEAD BREAKER LEVERAGE BAR



These lightweight, portable tools are a great alternative to handled bead breaking wedges or hydraulic bead breakers. One end is used to remove frozen or rusted beads from all types of rims.

Part#	Model	Length	Stock
34652	T52	33"	7/8"

STANDARD & HEAVY DUTY TUBELESS TIRE IRONS



Part#	Model	Length	Stock
34644	T45A-2000K		3/4"
34645	T45A	37"	3/4"
34647	T45HD	41"	7/8"
34847	T47A	52"	1"
34848	T47B	49-1/2"	1"

HEAVY DUTY TRUCK WRENCH



Use on trucks, buses, farm, and off road vehicles. Great for on-the-road service

Part#	Model	Socket Sizes
32509	TR9	1-1/4" X 1-1/16"
34402	TR11	30"

TUBELESS TIRE IRONS



34747



34748

Part#	Model	Length	Stock
34747	T46A	36"	3/4"
34748	T46B	36"	3/4"



KEN TOOL

CENTER POST TOOL



Slik-Stik™ works on most center-post tire changers to mount or demount tires. Tool can be used for all 12" to 17" full or semi-drop center wheels

Part#	Model	Length	Stock
34660	T143A	38"	1" Square

EPOXY KITS



Part#	Model Description	Hammer#
35201	T12B Epoxy Kit	TG11B,11R TG31,TG33R
35202	T12D Epoxy Kit	TG34,TG35 TG36,TG37

OFF SET MOUNT "C" BAR



Use "C" bar with the "B" extension bar for easier use on large, wide-base truck tires. Use on standard and large truck tires, including industrial, farm, buses, and tractors.

Part#	Model	Length	Stock
34749	T46C	22"	3/4"

2 LB RUBBER MALLET



Rubber head prevents marring surfaces.

Part#	Model	Length
35310	T32	17"

OFF SET MOUNT "C" BAR (HD)



Use "C" bar with the "B" extension bar for easier use on large, wide-base truck tires. Use on standard and large truck tires, including industrial, farm, buses, and tractors.

Part#	Model	Length	Stock
34849	T47C	27"	1"

GENERAL PURPOSE TIRE HAMMER



Designed for tire service in a variety of sizes and styles

Part#	Model	Handle#	Length
35311	T11B	T11BH	14-1/2"

WOOD REPLACEMENT HANDLES



Part#	Model	Length	Hammer#
35111	T11BH	15"	T11B
35113	T11HN	15"	T11R
35119	T11CH	17"	T11C
35127	T11DH	17"	T11D
35129	T11EH	30"	T11E

GENERAL PURPOSE TIRE HAMMER



Designed for tire service in a variety of sizes and styles

Part#	Model	Handle#	Length
35313	T11R	T11HN	14"

FIBERGLASS REPLACEMENT HANDLES



Part#	Model	Length	Hammer#
35211	TG11BH	16"	TG11B
35219	TG11CH	18"	TG11C
35227	TG11DH	18"	TG11D
35229	TG11EH	32"	TG11E

BEAD BREAKING HAMMER



WOOD HANDLED

Part#	Model	Handle#	Length
35327	T11D	T11DH	17"
35329	T11E	T11EH	30"



GENERAL PURPOSE HAMMER FIBERGLASS HANDLE




Part#	Model	Handle#	Length
35413	TG11R	TG31H	16"



Part#	Model	Handle#	Length
35417	TG33R	TG31H	16"

SERPENT DEMOUNT TOOL

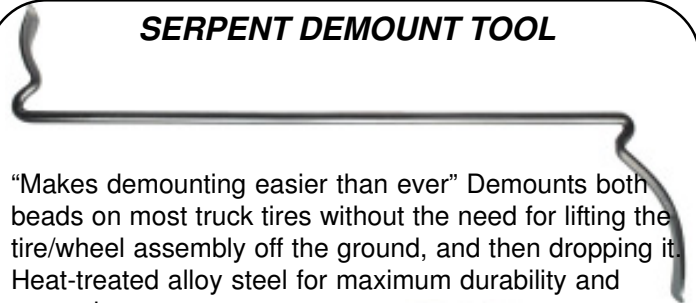

"Makes demounting easier than ever" Demounts both beads on most truck tires without the need for lifting the tire/wheel assembly off the ground, and then dropping it. Heat-treated alloy steel for maximum durability and strength.



Part#	Description	Length
35449	Demounting Tool	39"
35450	Mounting Tool	38"
31710	Bead Holder	
35453	3 Pc Kit Contents	35449,35450,31710

HEAVY DUTY TIRE HAMMER FIBERGLASS HANDLE




Part#	Model	Handle#	Length
35425	TG36	T11CH	18"

GENERAL PURPOSE HAMMER FIBERGLASS HANDLE



Part#	Model	Handle#	Length
35427	TG11D	TG11DH	18"
35429	TG11E	TG11EH	32"

4-WAY LUG WRENCH



Part#	Model	Socket Sizes	Length
35630	35630	17,19,21,23mm	20"
35638	35638	22,24,25,27mm	23"

PROFESSIONAL




Part#	Model	Socket Sizes	Length
35656	T56	17,19,21,22mm	20"
35657	T57	3/4,13/16 7/8,15/16"	23"

ECONOMY

Part#	Model	Socket Sizes	Length
35661	T61	3/4,13/16 7/8,17mm	22"
35662	T62	3/4,13/16 7/8,17mm	18"
35663	T63	17,19,21,22mm	18"

4-WAY LUG WRENCH

Ken-Tool offers the world's largest selection of quality lug wrenches, available in sizes to fit all your tire changing needs - SAE and Metric



Part#	Model	Socket Sizes	Length
35659	T59	3/4",13/16" 7/8",15/16"	22"

HEAVY DUTY 4-WAY LUG WRENCH



Use on heavy-duty truck, bus, and tractors. Drop-forged or welded center provides strength and durability

Part#	Model	Socket Sizes	Length
35695	TC95	1-1/2, 13/16 sq 30, 33mm	27-1/2"
35697	T95A	1-1/4, 1-1/2 13/16 sq 3/4 service arm	27-1/2"

SLEDGE HAMMER



High carbon steel, heat treated. Machined, polished face.

Part#	Model	Length	Eye Size
37308	84H-8	32"	1"X1-3/8"

MANUAL TIRE CHANGER



Mounts and demounts a full range of tires on rim diameters from 4 to 12 inches. Mounts easily to a bench or in any standard, four-position rim-clamp tire changer. A built-in, three fin centering device mounts standard lug-type rims with 2" and larger center hole. Square base prevents turning in the changer during use. Includes a Ken-Tool exclusive, 22" Tire Snake™ mount/demount tire tool.

Part#	Model	Height
38600	T600	16.5"

IMPACT BEAD BREAKERS



Bead breaker loosens beads with bead-breaking foot and ram bar, but never cuts the bead of the tire. The wedge foot is forced between the bead and rim flange. Breaker is designed for shop or road use.

No other bead breaking tools are necessary.

Part#	Model	Length	Ext. Length
35924	T24B	46"	72"
35926	T26B	50"	80"

TRUCK TIRE CHANGING STAND

Stand handles wheels or open rims 16.5" to 24". Double-slide adjustment with locking device prevents twisting so it stays aligned with the wheel or rim. Stand is the ideal height for driving off beads or demounting tires.



Part#	Model
KEN36015	T115

PROFESSIONAL WORKSHOP VISE



The Professional Series Workshop Vise has been the workhorse in the workshop. It is the most popular vise in the industry because it provides professional quality for a reasonable price.

Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity
6-1/2"	7-1/2"	3-3/4"	1/8"-2-1/2"

Part#
64065